

LANHE

Guangzhou Lanhe Electronic Technology Co., Ltd



Guangzhou Lanhe Electronic Technology Co., Ltd.

Tel/Wechat/whatsapp: +15976048254

Email: alexchow@gzlanhe.com

Add: Room 326, Building 1, No. 3 Hanoi Avenue, Dalong Subdistrict, Panyu District, Guangzhou, Guangdong, China

水下照明生产厂家

Underwater lighting manufacturer

Over 10 years experience in pool lighting production

Company Profile

We are professional in production of underwater LED lamps. We have advance technical team and advance equipment and workmanship plus we had got the ROHS, P66, CE FCC, certification pass the ISO 9001, ISO 2000 system.

We are professionally engaged in manufacture of various kind of underwater LED lamps over 10 years. Product include wall mounted stainless steel hanging lights, plastic full-sealed PMMA cup and LED lamps. Light source effects: multi color, Monochrome, internal control gradient, external control (IRMS312, synchronous colorful, power off mode control, four buttons, six button, eighteen key single on and remote control and colorful effects are available and are widely used in swimming pools, fountain water pool, scenic lighting, villa pool, garden view, family aquarium etc. For example plastic form, there are 8 injection machine for our own plastic parts and tool, with 3 assembly line for products manufacture and output is 1500-2000 pcs in a line at per day. Our QC make all inspection for the products on line. Mainly markets in Russia, American, U.K, Australia, Germany and so on.

There are strict quality control system in factory, covered material supplying evaluation incoming material inspection, Evaluation classification and warehouse storage as well as production quality control. With perfect production process, advanced manufacturing technique, strict inspection methods and good service we have a high reputation among the client.


Company Qualification




Factory Photo



Wiring diagram of pool light

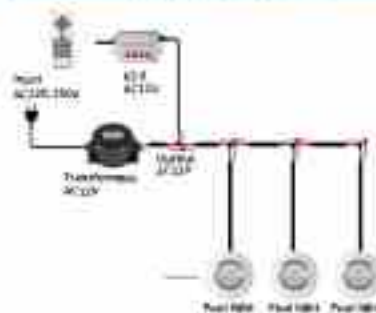


Wiring diagram of pool light

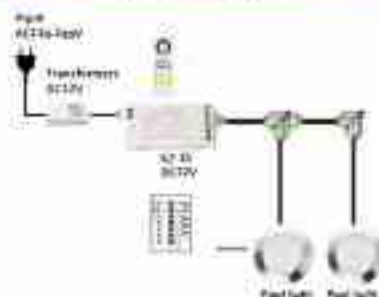

Wiring diagram of pool light



Wiring diagram of pool light

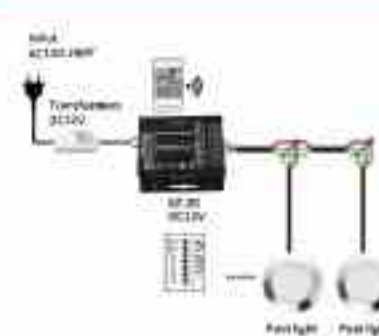



MODEL:JKD-YC280-AP

1. Concrete Pool Installation

2. Fiberglass Pool Installation

3. Fiberglass/Concrete Pool Installation



Model	Input	Output	Watt	Wattage	Lighting Effect	Notes
JKD-YC280-AP	220V	220V	220W	220W	220lm	Installation and wiring should be done by a professional electrician.



MODEL:JKD-YC260-AP

1. Concrete Pool Installation

2. Fiberglass Pool Installation

3. Fiberglass/Concrete Pool Installation



Model	Input	Output	Watt	Wattage	Lighting Effect	Notes
JKD-YC260-AP	220V	220V	220W	220W	220lm	Installation and wiring should be done by a professional electrician.




MODEL:JKD-YC260-3SP



1. Concrete Pool Installation

2. Fiberglass Pool Installation

3. Fiberglass/Concrete Pool Installation



Product	Model	Size (mm)	Light Output	Power	Working Voltage	Light Source	Light Source
Recessed Mount (200mm x 200mm)	JKD-YC260-3SP	260x260x38	1400lm	20W	AC110V	LED	LED




MODEL:JKD-YC230-AP



1. Concrete Pool Installation

2. Fiberglass Pool Installation

3. Fiberglass/Concrete Pool Installation



Product	Model	Size (mm)	Light Output	Power	Working Voltage	Lighting Effects	Light Source
Recessed Mount (200mm x 200mm)	JKD-YC230-AP	230x230x38	1200lm	20W	AC110V	LED	LED



MODEL:JKD-YC260-2AP

1. Concrete Pool Installation

2. Fiberglass Pool Installation


3. Fiberglass Pool Deck Installation



Model	Model	Material	Light Source	Power	Max. Voltage	Lighting Effect	Notes
JKD-YC260-2AP	JKD-YC260-2AP	200W	200W	200W	200W	200W	200W



MODEL:JKD-YC295-AP




Model	Model	Material	Light Source	Power	Max. Voltage	Lighting Effect	Notes
JKD-YC295-AP	JKD-YC295-AP	200W	200W	200W	200W	200W	200W



MODEL JKD-JM90-AP

MODEL JKD-JM160-AP

MODEL JKD-JM230-AP

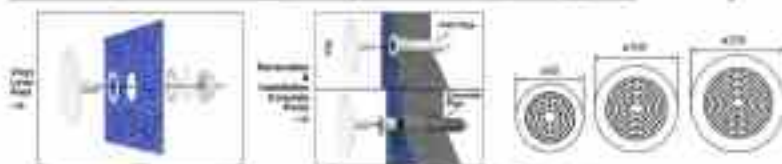

Product	Model	Lighting Type	Light Source	Power	Working Voltage	Lighting Size (mm)	Body Material
Under Water Light	JKD-JM90-AP	LED	24W	24V	AC 100-240V	90mm	ABS
	JKD-JM160-AP	LED	24W	24V	AC 100-240V	160mm	ABS
	JKD-JM230-AP	LED	24W	24V	AC 100-240V	230mm	ABS



MODEL JKD-JM110-SP

MODEL JKD-JM160-SP

MODEL JKD-JM230-SP



Product	Model	Lighting Type	Light Source	Power	Working Voltage	Lighting Size (mm)	Body Material
Under Water Light	JKD-JM110-SP	LED	12W	12V	AC 100-240V	110mm	ABS
	JKD-JM160-SP	LED	12W	12V	AC 100-240V	160mm	ABS
	JKD-JM230-SP	LED	12W	12V	AC 100-240V	230mm	ABS



MODEL JKD-GJ110-AP

MODEL JKD-GJ150-AP

MODEL JKD-GJ230-AP




Product	Model	Size (mm)	Light Output (lm)	Power (W)	Working Voltage (V)	Lighting Effect	Material
Multi-Color High-Intensity LED Pool Light	JKD-GJ110-AP	41x41x41	100	10W	AC220V	Multi-color and high intensity	ABS+PC+PMMA
	JKD-GJ150-AP	51x51x51	150	15W	AC220V	Multi-color and high intensity	ABS+PC+PMMA
	JKD-GJ230-AP	71x71x71	230	23W	AC220V	Multi-color and high intensity	ABS+PC+PMMA



MODEL JKD-GJ110-SP

MODEL JKD-GJ145-SP

MODEL JKD-GJ215-SP

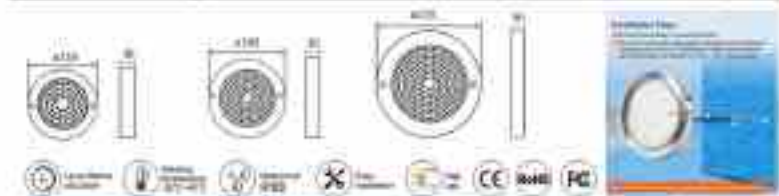

Product	Model	Size (mm)	Light Output (lm)	Power (W)	Working Voltage (V)	Lighting Effect	Material
Multi-Color High-Intensity LED Pool Light	JKD-GJ110-SP	41x41x41	100	10W	AC220V	Multi-color and high intensity	ABS+PC+PMMA
	JKD-GJ145-SP	51x51x51	145	14W	AC220V	Multi-color and high intensity	ABS+PC+PMMA
	JKD-GJ215-SP	71x71x71	215	21W	AC220V	Multi-color and high intensity	ABS+PC+PMMA



MODEL-JKD-YC300-SP
JKD-YC230-SP

MODEL-JKD-YC300-SP

MODEL-JKD-YC230-SP



MODEL-JKD-YC300-SP



MODEL-JKD-YC230-SP



Model	Power	Lighting	Lighting	Lighting	Lighting	Lighting	Lighting
JKD-YC300-SP	12W	12W	12W	12W	12W	12W	12W
JKD-YC230-SP	12W	12W	12W	12W	12W	12W	12W



MODEL-JKD-YC300-SWP
JKD-YC230-SWP

MODEL-JKD-YC300-SWP

MODEL-JKD-YC230-SWP



MODEL-JKD-YC300-SWP



MODEL-JKD-YC230-SWP



Model	Power	Lighting	Lighting	Lighting	Lighting	Lighting	Lighting
JKD-YC300-SWP	12W	12W	12W	12W	12W	12W	12W
JKD-YC230-SWP	12W	12W	12W	12W	12W	12W	12W



MODEL:JKD-YC152-SP



For use	Model	Control	Light source	Power	Working voltage	Lighting effect	Notes
Indoor/Outdoor	JKD-YC152-SP	12V/24V	LED	15W	AC/DC	Indoor/Outdoor	Indoor/Outdoor



MODEL:JKD-YC152-AP



For use	Model	Control	Light source	Power	Working voltage	Lighting effect	Notes
Indoor/Outdoor	JKD-YC152-AP	12V/24V	LED	15W	AC/DC	Indoor/Outdoor	Indoor/Outdoor




MODEL:JKD-YC260-2SP



Product	Model	220V/110V	Light Source	Power	Maximal Output	Lighting effect	Body Material
Recessed/In-ground LED Pool Light	JKD-YC260-2SP	220V/110V	20W/25W	24W	400lm	Recessed and in-ground pool light with no body	Stainless Steel with Rubber Ring
				24W	400lm		
				24W	400lm		



MODEL:JKD-YC260-SP
JKD-YC290-SP

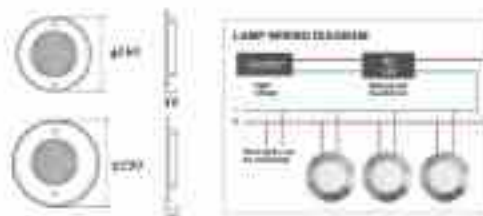

Product	Model	220V/110V	Light Source	Power	Maximal Output	Lighting effect	Body Material
Recessed/In-ground LED Pool Light	JKD-YC260-SP	220V/110V	20W/25W	24W	400lm	Recessed and in-ground pool light with no body	Stainless Steel with Rubber Ring
				24W	400lm		
				24W	400lm		




MODEL JKD-UT90-AP MODEL JKD-UT160-AP MODEL JKD-UT230-AP



Product	Model	Lighting Type	Light Output	Power	Working Voltage	Lighting Effect	Product Features
Recessed Backlight (LED Pool Light)	JKD-UT90-AP	LED	10W	12V	12V	12V	12V
	JKD-UT160-AP	LED	16W	12V	12V	12V	12V
	JKD-UT230-AP	LED	23W	12V	12V	12V	12V



MODEL JKD-UT230-4SP



Product	Model	Lighting Type	Light Output	Power	Working Voltage	Lighting Effect	Product Features
Recessed Backlight (LED Pool Light)	JKD-UT90-4SP	LED	10W	12V	12V	12V	12V
	JKD-UT160-4SP	LED	16W	12V	12V	12V	12V
	JKD-UT230-4SP	LED	23W	12V	12V	12V	12V



MODEL JKD-UT110-35P

MODEL JKD-UT160-35P

MODEL JKD-UT210-35P

- Only 10MM thickness
- Marine Grade stainless steel
- House Filled, 100% Waterproof
- Multiple with remote control, automation modes
- With Type module customer which support smart app with control, Music Control, Voice control



MODEL JKD-UT110-35P

MODEL JKD-UT160-35P



MODEL JKD-UT210-35P



Product	Model	Size (mm)	Light Output	Power	Working Voltage	Lighting Effects	Smart Features
Underwater LED Swimming Pool Light	JKD-UT110-35P	110mm	35W	12V	12V	Multi-color, dimming, and music control	Remote control, app control, voice control
	JKD-UT160-35P	160mm	35W	12V	12V	Multi-color, dimming, and music control	Remote control, app control, voice control
	JKD-UT210-35P	210mm	35W	12V	12V	Multi-color, dimming, and music control	Remote control, app control, voice control



MODEL:JKD-UT250-SP






Product	Model	Voltage	Light Source	Power	Working Voltage	Lighting Effects	Wiring Method
				150w			
LED Swimming Pool Light	JKD-UT250-SP	220V/240V	150W LED	150W	220V	Instant on and water proof light is durable and safe.	Wiring Method: See the wiring diagram.



MODEL:JKD-UT250-2SP



Product	Model	Voltage	Light Source	Power	Working Voltage	Lighting Effects	Wiring Method
				150w			
LED Swimming Pool Light	JKD-UT250-2SP	220V/240V	150W LED	150W	220V	Instant on and water proof light is durable and safe.	Wiring Method: See the wiring diagram.

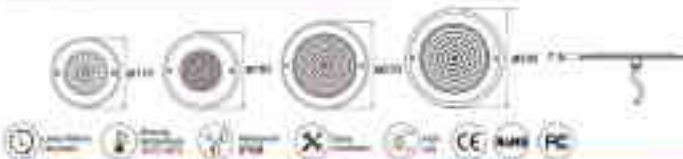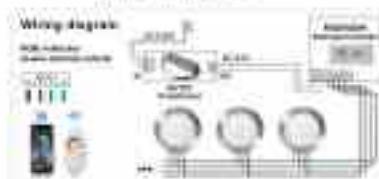

Product	Model	Control Method	Power	Light	Waterproof	Lighting Effect	Smart Control
Wireless Smart LED Illuminated Pool Light	JKD-UT100-SP	Remote Control	10W	RGB LED	IP68	Innovative design, the light is soft and comfortable.	Supports smart app control, voice control, and physical button control.
	JKD-UT110-SP	Remote Control	15W				
	JKD-UT220-SP	Remote Control	20W				
	JKD-UT330-SP	Remote Control	30W				
	JKD-UT440-SP	Remote Control	40W				



MODEL JKD-UT230-2SP



MODEL JKD-UT110-2SP




MODEL JKD-UT150-2SP



MODEL JKD-UT130-2SP




MODEL JKD-UT180-2SP



Product	Model	Power (W)	Power (W)	Light (lm)	Working Voltage (V)	Lighting Efficiency (lm/W)	Notes
	JKD-UT110-2SP	110W	110W	1100	AC220V	10	
	JKD-UT130-2SP	130W	130W	1300	AC220V	10	
	JKD-UT150-2SP	150W	150W	1500	AC220V	10	
	JKD-UT180-2SP	180W	180W	1800	AC220V	10	
	JKD-UT230-2SP	230W	230W	2300	AC220V	10	



MODEL:JKD-UT250-AP

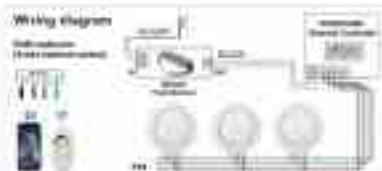[illegible]

MODEL:JKD-YC295-A



Product	Model	Current	Unit Price	Price	Weight (kg)	Group (mm)	Reference
Wp. installed floor ball	Wp. Floor A	2020/11/10	1/20/20	1000	AC208	A	Wp. PC
			1/20/20	1000			
			1/20/20	1000			
			1/20/20	1000			
			1/20/20	1000			



MODEL:JKD-YC260-A



Model	Material	Power	Light Source	Power	Voltage & Output	Lighting Effect	Application
Air-mounted Underwater Light	ABS-PC	JKD-YC260-A	TLM-PH01	51W	AC 220V	Illumination	ABS-PC
				100W			
				144W			
				200W			
				300W			
Waterproof Underwater Light	ABS-PC	JKD-YC260-B	TLM-PH01	51W	AC 220V	Illumination	ABS-PC
				100W			
				144W			



MODEL:JKD-YC295-2A
JKD-YC230-2A



Model	Material	Power	Light Source	Power	Voltage & Output	Lighting Effect	Application
Air-mounted Underwater Light	ABS-PC	JKD-YC295-2A	TLM-PH01	51W	AC 220V	Illumination	ABS-PC
				100W			
				144W			
				200W			
				300W			
Waterproof Underwater Light	ABS-PC	JKD-YC230-2A	TLM-PH01	51W	AC 220V	Illumination	ABS-PC
				100W			
				144W			



40
180
MODEL JKD-YC180-B



40
230
MODEL JKD-YC230-B



70
300
MODEL JKD-YC300-B



45
180
MODEL JKD-YC180-BW



48
230
MODEL JKD-YC230-BW




70
300
MODEL JKD-YC300-BW



Product	Model	Light Type	Power	Light Output	Working Voltage	Working place	Notes
Waterproof Pool Light	JKD-YC180-BW (18W)	3000K	18W	1200lm	AC110V	Indoor and outdoor use, and can be used in the pool.	Standard 18W LED light
	JKD-YC180-B (18W)		18W				
	JKD-YC180-BW (18W)		18W				
	JKD-YC230-BW (23W)	3000K	23W				
	JKD-YC230-B (23W)		23W				
	JKD-YC230-BW (23W)		23W				
Waterproof Pool Light	JKD-YC300-BW (30W)	3000K	30W	1800lm	AC110V	Indoor and outdoor use, and can be used in the pool.	Standard 30W LED light
	JKD-YC300-B (30W)		30W				
	JKD-YC300-BW (30W)		30W				
	JKD-YC300-BW (30W)	3000K	30W				
	JKD-YC300-B (30W)		30W				
	JKD-YC300-BW (30W)		30W				




MODEL JKD-YC230-A



Model	Power	Working voltage	Lighting voltage	Lighting color	Body material
JKD-YC230-A	100W	220V	12V	Blue	ABS



MODEL JKD-YC230-3A



Model	Power	Working voltage	Lighting voltage	Lighting color	Body material
JKD-YC230-3A	300W	220V	12V	Blue	ABS



MODEL:JKD-YC292-A

Model	Size (mm)	Material	LED Type	Power	Rated Voltage	Lighting Effect	Max. Voltage
Water mounted (not for pool)	100x100x4	ABS/PC	2835	20W	AC120V	Irradiation long distance and concentrated light	400VAC
			2835	18W			
			2835	16W			
			2835	14W			
			2835	12W			
Water mounted (not for pool)	100x100x4	ABS/PC	2835	10W	AC120V	Irradiation more wider The light is dimmer and focusing	400VAC
			2835	8W			
			2835	6W			



MODEL:JKD-YC286-A

Model	Size (mm)	Material	LED Type	Power	Rated Voltage	Lighting Effect	Max. Voltage
Water mounted (not for pool)	100x100x4	ABS/PC	2835	20W	AC120V	Irradiation long distance and concentrated light	400VAC
			2835	18W			
			2835	16W			
			2835	14W			
			2835	12W			
Water mounted (not for pool)	100x100x4	ABS/PC	2835	10W	AC120V	Irradiation more wider The light is dimmer and focusing	400VAC
			2835	8W			
			2835	6W			



MODEL:JKD-QR257-5



Product	Model	Power (W)	Light Output (lm)	Beam Angle	Material	Light Color	Notes
Pool Illumination (LED Pool Light)	JKD-QR257-5P	25W	2500	120°	Aluminum	White	For outdoor use only
	JKD-QR257-3	25W	2500	120°	Aluminum	White	For outdoor use only
	JKD-QR146-5P	146W	14600	120°	Aluminum	White	For outdoor use only
	JKD-QR146-3	146W	14600	120°	Aluminum	White	For outdoor use only



MODEL:JKD-QR257-25



Product	Model	Power (W)	Light Output (lm)	Beam Angle	Material	Light Color	Notes
Pool Illumination (LED Pool Light)	JKD-QR257-25P	25W	2500	120°	Aluminum	White	For outdoor use only
	JKD-QR257-25	25W	2500	120°	Aluminum	White	For outdoor use only
	JKD-QR146-25P	146W	14600	120°	Aluminum	White	For outdoor use only
	JKD-QR146-25	146W	14600	120°	Aluminum	White	For outdoor use only



MODEL JKD-QR146-SA

MODEL JKD-QR146-SS



Stainless Steel Niche

ABS Niche



Model	Power	Material	Light Output	Power	Material	Light Output	Material
JKD-QR146-SA	150W	Stainless Steel	150W	150W	ABS	150W	ABS
Excluded Pool Light	150W	Stainless Steel	150W	150W	ABS	150W	ABS
JKD-QR146-SS	150W	Stainless Steel	150W	150W	ABS	150W	ABS



MODEL JKD-QR257-SA

MODEL JKD-QR257-SS



Stainless Steel Niche



ABS Niche



Model	Power	Material	Light Output	Power	Material	Light Output	Material
JKD-QR257-SA	150W	Stainless Steel	150W	150W	ABS	150W	ABS
Excluded Pool Light	150W	Stainless Steel	150W	150W	ABS	150W	ABS
JKD-QR257-SS	150W	Stainless Steel	150W	150W	ABS	150W	ABS



MODEL:JKD-QR95-A



Product	Model	Watt	Light Source	Material	Working Voltage	Body Volume
Underwater Pool Light	JKD-QR95-A	100W/120W	LED 100W/120W	ABS	AC120V	1000ml/1200ml



MODEL:JKD-QR95-2A



Product	Model	Watt	Light Source	Material	Working Voltage	Body Volume
Underwater Pool Light	JKD-QR95-2A	100W/120W	LED 100W/120W	ABS	AC120V	1000ml/1200ml



MODEL:JKD-QR195-S

MODEL:JKD-QR270-S



Product	Model	Version	Light Source	Power	Working Voltage	Installation	Notes
Recessed Pool Light	JKD-QR195-S	0100195S	4000K 10W LED	40W / 10W LMW / 10W	AC120V	Installation: 1. Cut out the hole and install the light. 2. Connect the power cable to the light. 3. Tighten the screws.	1. Check the voltage and power before installation. 2. Do not touch the lens or the LED array.
	JKD-QR270-S	0100270S	4000K 20W LED	40W / 20W LMW / 20W	AC120V	Installation: 1. Cut out the hole and install the light. 2. Connect the power cable to the light. 3. Tighten the screws.	1. Check the voltage and power before installation. 2. Do not touch the lens or the LED array.



MODEL:JKD-QR290-A5

MODEL:JKD-QR290-A



Product	Model	Version	Light Source	Power	Working Voltage	Installation	Notes
Recessed Pool Light	JKD-QR290-A	0100290A	4000K 10W LED	40W / 10W LMW / 10W	AC120V	Installation: 1. Cut out the hole and install the light. 2. Connect the power cable to the light. 3. Tighten the screws.	1. Check the voltage and power before installation. 2. Do not touch the lens or the LED array.
	JKD-QR290-B	0100290B	4000K 20W LED	40W / 20W LMW / 20W	AC120V	Installation: 1. Cut out the hole and install the light. 2. Connect the power cable to the light. 3. Tighten the screws.	1. Check the voltage and power before installation. 2. Do not touch the lens or the LED array.



MODEL JKD-QR280-AP

MODEL JKD-QR280-P56



Product	Model	Light Type	Power	Working Voltage	Control System	Light Diameter
Underwater Light	JKD-QR280-AP	LED	10W	AC 110V	Push button control	280mm
	JKD-QR280-P56	LED	5W	AC 110V	Push button control	280mm
	JKD-QR280-P10	LED	10W	AC 110V	Push button control	280mm



MODEL JKD-QR280-A



Product	Model	Light Type	Power	Working Voltage	Control System	Light Diameter
Underwater Light	JKD-QR280-A	LED	10W	AC 110V	Push button control	280mm
	JKD-QR280-A	LED	15W	AC 110V	Push button control	280mm
	JKD-QR280-A	LED	20W	AC 110V	Push button control	280mm
	JKD-QR280-A	LED	30W	AC 110V	Push button control	280mm



MODEL:JKD-QR160-A




Product	Model	Material	Light Output	Power	Working Voltage	Dimensions (mm)	Notes
Outdoor Flood Light	JKD-QR160-A	304/316 SS	1600lm	20W	AC 110V	160mm (D) x 160mm (H)	1. High quality LED chips 2. The light is waterproof 3. No flicker



MODEL:JKD-QR282-A5

MODEL:JKD-QR282-A



Product	Model	Material	Light Output	Power	Working Voltage	Dimensions (mm)	Notes
Outdoor Flood Light	JKD-QR282-A	304/316 SS	2800lm	20W	AC 110V	280mm (D) x 280mm (H)	1. High quality LED chips 2. The light is waterproof 3. No flicker



MODEL:JKD-YC220-5AP



Product	Model	Size/Color	Light Source	Power	Working Voltage	Lighting Effect	Body Material
Starfish LED Light (5AP)	JKD-YC220-5AP	500x500mm	LED	220W	AC 220V-240V	Colorful and bright	ABS Plastic




MODEL:JKD-YC180-3AP



Product	Model	Size/Color	Light Source	Power	Working Voltage	Lighting Effect	Body Material
Starfish LED Light (3AP)	JKD-YC180-3AP	180x180mm	LED	180W	AC 220V-240V	Colorful and bright	ABS Plastic



MODEL:JKD-YC230-P56



Product	Model	Material	Wattage	Power	Lighting effect	Light Material
Round LED light fixture (50mm x 50mm)	JKD-YC230-P56	ABS+PC	1W	1W	Instantaneous protection The light is strong and the lighting is uniform	ABS+PC
			3W	3W		
			5W	5W		



MODEL:JKD-PT6-AP

- IP65 Waterproof
- Pouring And Waterproofing Process



Product	Model	Material	Wattage	Power	Lighting effect	Light Material
Round LED light fixture (50mm x 50mm)	JKD-PT6-AP	ABS+PC	1W	1W	Instantaneous protection The light is strong and the lighting is uniform	ABS+PC
			3W	3W		
			5W	5W		



MODEL:JKD-P56-TG



It can replace down-sinking pool lights



Product	Model	Material	LED Quantity	Power	LED Type	Lighting Effect	Beam Angle
Pool Part Light	JKD-P56-TG	PVC/PA	120	12W	AC220V	Irradiation distance and 360° omnidirectional light	Glass
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
Pool Part Light	JKD-P56-TG	PVC/PA	120	12W	AC220V	Irradiation distance and 360° omnidirectional light	Glass
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			



MODEL:JKD-P56-SS



Product	Model	Material	LED Quantity	Power	LED Type	Lighting Effect	Beam Angle
Pool Part Light	JKD-P56-SS	PVC/PA	120	12W	AC220V	Irradiation distance and 360° omnidirectional light	Glass
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
Pool Part Light	JKD-P56-SS	PVC/PA	120	12W	AC220V	Irradiation distance and 360° omnidirectional light	Glass
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			



MODEL:JKD-P56-G



Product	Model	Material	LED Quantity	Power	LED Type	Lighting Effect	Beam Angle
Pool Part Light	JKD-P56-G	PVC/PA	120	12W	AC220V	Irradiation distance and 360° omnidirectional light	Glass
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
Pool Part Light	JKD-P56-G	PVC/PA	120	12W	AC220V	Irradiation distance and 360° omnidirectional light	Glass
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			
		PA	120	12W			



MODEL:JKD-P56-A



Product	Model	Version	Light Source	Power	Voltage	Lighting Effects	Warranty Period
				150W			
				150W		Emulates long distance and concentrated light	
LED Pool Light	JKD-P56-A	D177x83	LED	150W	AC120V	/	2Yr
			LED	150W		Emulates and makes the light's depth and the floating	
				150W			
				150W			




MODEL:JKD-P56-S



Product	Model	Version	Light Source	Power	Voltage	Lighting Effects	Warranty Period
				150W			
				150W		Emulates long distance and concentrated light	
LED Pool Light	JKD-P56-S	D177x83	LED	150W	AC120V	/	2Yr
			LED	150W		Emulates and makes the light's depth and the floating	
				150W			
				150W			



MODEL JKD-P38-3A



Product	Model	Wavelength	Light Source	Power	Working Voltage	Luminous flux	Light Beam Angle
RGB Flood Light	JKD-P38-3A	3530nm	LED	40W	220-240V	3000lm	120°



MODEL JKD-P38-AS



Product	Model	Wavelength	Light Source	Power	Working Voltage	Luminous flux	Light Beam Angle
RGB Flood Light	JKD-P38-AS	3530nm	LED	40W	220-240V	3000lm	120°











MODEL:JKD-PQ-A163

TWO nozzles are optional

(nozzles are optional for color and structure water show)



MODEL:JKD-PQ-A180



Model	Size (mm)	Power (W)	Water Flow (L/min)	Water Height (m)	Water Color	Water Type
JKD-PQ-A71	200x150	200W	200L/min	1.5m	Blue	Water
JKD-PQ-A82	250x150	250W	250L/min	1.5m	Blue	Water
JKD-PQ-A164	300x150	300W	300L/min	1.5m	Blue	Water
JKD-PQ-A188	350x150	350W	350L/min	1.5m	Blue	Water



MODEL:JKD-TQ-501

MODEL:JKD-TQ-502



Model	Size (mm)	Power (W)	Water Flow (L/min)	Water Height (m)	Water Color	Water Type
JKD-TQ-501	200x150	200W	200L/min	1.5m	Blue	Water
JKD-TQ-502	250x150	250W	250L/min	1.5m	Blue	Water
JKD-TQ-503	300x150	300W	300L/min	1.5m	Blue	Water
JKD-TQ-504	350x150	350W	350L/min	1.5m	Blue	Water



MODEL:JKD-SD-E235



Installation Note:
Please read the installation manual
before installing the light fixture.
The light fixture is not a pool
light, it is a surface light.



Product	Model	Size (mm)	Power	Light Source	Working Voltage	Application	Notes
Surface mounted (LED underwater light)	JKD-SD-E235	Ø127*140	20W	5050 SMD	AC 110V	Indoor and outdoor and Corrosion-resistant IP68	Standard size
	JKD-SD-E185	Ø127*140	15W				
	JKD-SD-E160	Ø127*140	10W				
	JKD-SD-E125	Ø127*140	5W				
	JKD-SD-E110	Ø127*140	5W				



MODEL:JKD-DX-SL300



Product	Model	Size (mm)	Power	Light Source	Working Voltage	Application	Notes
Surface mounted (LED underwater light)	JKD-DX-SL300	1200*300*110	30W	5050 SMD	AC 110V	Indoor and outdoor and Corrosion-resistant IP68	Standard size
	JKD-DX-SL300	1200*300*110	15W				
	JKD-DX-SL300	1200*300*110	10W				
	JKD-DX-SL300	1200*300*110	5W				
	JKD-DX-SL300	1200*300*110	5W				



Model	Power	Length	Width	Weight	Material	Color	LED Type	Max. Temp.	Max. Voltage
JKD-DD01	15W	5m	25mm	100g	ABS	RGB	SMD 5050	60°C	24V



Product	Model	Power	Working Voltage	Working Current	Max. Length	Max. Depth	Max. Water Flow	Max. Water Pressure
JKD-DD01	15W	15W	24V	0.6A	5m	0.5m	100L/min	1.5MPa



LED Water Descent

- Fishbowl, one piece molding, free shape, lightweight design, beautiful and elegant design.
- Acrylic material, high temperature resistance, corrosion resistance, excellent resistance.
- Constant Water Flow/Return and circulation (cycling) setting.
- Suitable for reef, corals, Barren, Planted water feature walls.



Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Volt age
with LED light							
PH100-K101	Glass/Glass	100	120	50	30	4W	Solar 1212V Type: 12120-100
PH100-K102	Glass/Glass	100	120	50	30	4W	
PH100-K103	Glass/Glass	100	120	50	30	4W	
PH100-K104	Glass/Glass	100	120	50	30	6W	Solar 1212V Type: 12120-100
PH100-K105	Glass/Glass	100	120	50	30	6W	
PH100-K106	Glass/Glass	100	120	50	30	6W	
PH100-K107	Glass/Glass	100	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K108	Glass/Glass	100	120	50	30	10W	
PH100-K109	Glass/Glass	100	120	50	30	10W	
PH100-K110	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K111	Glass/Glass	110	120	50	30	10W	
PH100-K112	Glass/Glass	110	120	50	30	10W	
PH100-K113	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K114	Glass/Glass	110	120	50	30	10W	
PH100-K115	Glass/Glass	110	120	50	30	10W	
PH100-K116	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K117	Glass/Glass	110	120	50	30	10W	
PH100-K118	Glass/Glass	110	120	50	30	10W	
PH100-K119	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K120	Glass/Glass	110	120	50	30	10W	
PH100-K121	Glass/Glass	110	120	50	30	10W	
PH100-K122	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K123	Glass/Glass	110	120	50	30	10W	
PH100-K124	Glass/Glass	110	120	50	30	10W	
PH100-K125	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K126	Glass/Glass	110	120	50	30	10W	
PH100-K127	Glass/Glass	110	120	50	30	10W	
PH100-K128	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K129	Glass/Glass	110	120	50	30	10W	
PH100-K130	Glass/Glass	110	120	50	30	10W	
PH100-K131	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K132	Glass/Glass	110	120	50	30	10W	
PH100-K133	Glass/Glass	110	120	50	30	10W	
PH100-K134	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K135	Glass/Glass	110	120	50	30	10W	
PH100-K136	Glass/Glass	110	120	50	30	10W	
PH100-K137	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K138	Glass/Glass	110	120	50	30	10W	
PH100-K139	Glass/Glass	110	120	50	30	10W	
PH100-K140	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K141	Glass/Glass	110	120	50	30	10W	
PH100-K142	Glass/Glass	110	120	50	30	10W	
PH100-K143	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K144	Glass/Glass	110	120	50	30	10W	
PH100-K145	Glass/Glass	110	120	50	30	10W	
PH100-K146	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K147	Glass/Glass	110	120	50	30	10W	
PH100-K148	Glass/Glass	110	120	50	30	10W	
PH100-K149	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K150	Glass/Glass	110	120	50	30	10W	
PH100-K151	Glass/Glass	110	120	50	30	10W	
PH100-K152	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K153	Glass/Glass	110	120	50	30	10W	
PH100-K154	Glass/Glass	110	120	50	30	10W	
PH100-K155	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K156	Glass/Glass	110	120	50	30	10W	
PH100-K157	Glass/Glass	110	120	50	30	10W	
PH100-K158	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K159	Glass/Glass	110	120	50	30	10W	
PH100-K160	Glass/Glass	110	120	50	30	10W	
PH100-K161	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K162	Glass/Glass	110	120	50	30	10W	
PH100-K163	Glass/Glass	110	120	50	30	10W	
PH100-K164	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K165	Glass/Glass	110	120	50	30	10W	
PH100-K166	Glass/Glass	110	120	50	30	10W	
PH100-K167	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K168	Glass/Glass	110	120	50	30	10W	
PH100-K169	Glass/Glass	110	120	50	30	10W	
PH100-K170	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K171	Glass/Glass	110	120	50	30	10W	
PH100-K172	Glass/Glass	110	120	50	30	10W	
PH100-K173	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K174	Glass/Glass	110	120	50	30	10W	
PH100-K175	Glass/Glass	110	120	50	30	10W	
PH100-K176	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K177	Glass/Glass	110	120	50	30	10W	
PH100-K178	Glass/Glass	110	120	50	30	10W	
PH100-K179	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K180	Glass/Glass	110	120	50	30	10W	
PH100-K181	Glass/Glass	110	120	50	30	10W	
PH100-K182	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K183	Glass/Glass	110	120	50	30	10W	
PH100-K184	Glass/Glass	110	120	50	30	10W	
PH100-K185	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K186	Glass/Glass	110	120	50	30	10W	
PH100-K187	Glass/Glass	110	120	50	30	10W	
PH100-K188	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K189	Glass/Glass	110	120	50	30	10W	
PH100-K190	Glass/Glass	110	120	50	30	10W	
PH100-K191	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K192	Glass/Glass	110	120	50	30	10W	
PH100-K193	Glass/Glass	110	120	50	30	10W	
PH100-K194	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K195	Glass/Glass	110	120	50	30	10W	
PH100-K196	Glass/Glass	110	120	50	30	10W	
PH100-K197	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K198	Glass/Glass	110	120	50	30	10W	
PH100-K199	Glass/Glass	110	120	50	30	10W	
PH100-K200	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K201	Glass/Glass	110	120	50	30	10W	
PH100-K202	Glass/Glass	110	120	50	30	10W	
PH100-K203	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K204	Glass/Glass	110	120	50	30	10W	
PH100-K205	Glass/Glass	110	120	50	30	10W	
PH100-K206	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K207	Glass/Glass	110	120	50	30	10W	
PH100-K208	Glass/Glass	110	120	50	30	10W	
PH100-K209	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K210	Glass/Glass	110	120	50	30	10W	
PH100-K211	Glass/Glass	110	120	50	30	10W	
PH100-K212	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K213	Glass/Glass	110	120	50	30	10W	
PH100-K214	Glass/Glass	110	120	50	30	10W	
PH100-K215	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K216	Glass/Glass	110	120	50	30	10W	
PH100-K217	Glass/Glass	110	120	50	30	10W	
PH100-K218	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K219	Glass/Glass	110	120	50	30	10W	
PH100-K220	Glass/Glass	110	120	50	30	10W	
PH100-K221	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K222	Glass/Glass	110	120	50	30	10W	
PH100-K223	Glass/Glass	110	120	50	30	10W	
PH100-K224	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K225	Glass/Glass	110	120	50	30	10W	
PH100-K226	Glass/Glass	110	120	50	30	10W	
PH100-K227	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K228	Glass/Glass	110	120	50	30	10W	
PH100-K229	Glass/Glass	110	120	50	30	10W	
PH100-K230	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K231	Glass/Glass	110	120	50	30	10W	
PH100-K232	Glass/Glass	110	120	50	30	10W	
PH100-K233	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K234	Glass/Glass	110	120	50	30	10W	
PH100-K235	Glass/Glass	110	120	50	30	10W	
PH100-K236	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K237	Glass/Glass	110	120	50	30	10W	
PH100-K238	Glass/Glass	110	120	50	30	10W	
PH100-K239	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K240	Glass/Glass	110	120	50	30	10W	
PH100-K241	Glass/Glass	110	120	50	30	10W	
PH100-K242	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K243	Glass/Glass	110	120	50	30	10W	
PH100-K244	Glass/Glass	110	120	50	30	10W	
PH100-K245	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K246	Glass/Glass	110	120	50	30	10W	
PH100-K247	Glass/Glass	110	120	50	30	10W	
PH100-K248	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K249	Glass/Glass	110	120	50	30	10W	
PH100-K250	Glass/Glass	110	120	50	30	10W	
PH100-K251	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K252	Glass/Glass	110	120	50	30	10W	
PH100-K253	Glass/Glass	110	120	50	30	10W	
PH100-K254	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K255	Glass/Glass	110	120	50	30	10W	
PH100-K256	Glass/Glass	110	120	50	30	10W	
PH100-K257	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K258	Glass/Glass	110	120	50	30	10W	
PH100-K259	Glass/Glass	110	120	50	30	10W	
PH100-K260	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K261	Glass/Glass	110	120	50	30	10W	
PH100-K262	Glass/Glass	110	120	50	30	10W	
PH100-K263	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K264	Glass/Glass	110	120	50	30	10W	
PH100-K265	Glass/Glass	110	120	50	30	10W	
PH100-K266	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K267	Glass/Glass	110	120	50	30	10W	
PH100-K268	Glass/Glass	110	120	50	30	10W	
PH100-K269	Glass/Glass	110	120	50	30	10W	Solar 1212V Type: 12120-100
PH100-K270							



MODEL:JKD-PB-S63



Two special water outlet designs



Either direction for plumbing



Model NO	Take Over Size (mm)	W (mm)	H (mm)	C (mm)	D (mm)	Power	Voltage
with LED light							
PK100-S63	100mm x 100mm	300	100	100	90	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	4W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	90	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	

with LED light							
PK100-S63	100mm x 100mm	300	100	100	90	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	90	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	Input: AC110V Output: AC110V
PK100-S63	100mm x 100mm	300	100	100	100	9W	
PK100-S63	100mm x 100mm	300	100	100	100	9W	



Either direction for plumbing



MODEL JKD-PB-3S

Two special water inlet designs



Two installation methods



External Wall Mounting



A convenient plug-in function to fit various hoses



Model NO	Take Power Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Power (W)	Voltage
With LED light							
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	Model: 9022V Type: AC/DC/24V
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Without LED light							
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	Model: 9022V Type: AC/DC/24V
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	
Model JKD-PB-3S	420mm / 320mm	80	200	100	120	10W	



MODEL: JKD-P6-2B

■ Porously Linear Water Descent

- Moist germs were dissolving in clean water that is being paper-molding, more slowly, uniformed only about 10 and 1000 (1000)
- Acrylic ink on high temperature to be used in computer displays, published in 1990
- **Control Water Flow** (1000 and 1000) and 1000 (1000) and 1000 (1000)
- **Stable** (1000 and 1000) and 1000 (1000) and 1000 (1000)



Model NO	Take Over Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Power	Voltage
with LED light							
PH-300-2500-1	Glass/Glass	300	320	50	30	9W	Sukla 1212V
PH-300-2500-2	Glass/Glass	300	330	50	30	9W	PH-300-2500-2
PH-300-2500-3	Glass/Glass	300	340	50	30	9W	
PH-300-2500-4	Glass/Glass	300	350	50	30	9W	
PH-300-2500-5	Glass/Glass	300	360	50	30	9W	
PH-300-2500-6	Glass/Glass	300	370	50	30	9W	
PH-300-2500-7	Glass/Glass	300	380	50	30	9W	
PH-300-2500-8	Glass/Glass	300	390	50	30	9W	
PH-300-2500-9	Glass/Glass	300	400	50	30	9W	
PH-300-2500-10	Glass/Glass	300	410	50	30	9W	
PH-300-2500-11	Glass/Glass	300	420	50	30	9W	
PH-300-2500-12	Glass/Glass	300	430	50	30	9W	
PH-300-2500-13	Glass/Glass	300	440	50	30	9W	
PH-300-2500-14	Glass/Glass	300	450	50	30	9W	
PH-300-2500-15	Glass/Glass	300	460	50	30	9W	
PH-300-2500-16	Glass/Glass	300	470	50	30	9W	
PH-300-2500-17	Glass/Glass	300	480	50	30	9W	
PH-300-2500-18	Glass/Glass	300	490	50	30	9W	
PH-300-2500-19	Glass/Glass	300	500	50	30	9W	
PH-300-2500-20	Glass/Glass	300	510	50	30	9W	
PH-300-2500-21	Glass/Glass	300	520	50	30	9W	
PH-300-2500-22	Glass/Glass	300	530	50	30	9W	
PH-300-2500-23	Glass/Glass	300	540	50	30	9W	
PH-300-2500-24	Glass/Glass	300	550	50	30	9W	
PH-300-2500-25	Glass/Glass	300	560	50	30	9W	
PH-300-2500-26	Glass/Glass	300	570	50	30	9W	
PH-300-2500-27	Glass/Glass	300	580	50	30	9W	
PH-300-2500-28	Glass/Glass	300	590	50	30	9W	
PH-300-2500-29	Glass/Glass	300	600	50	30	9W	
PH-300-2500-30	Glass/Glass	300	610	50	30	9W	
PH-300-2500-31	Glass/Glass	300	620	50	30	9W	
PH-300-2500-32	Glass/Glass	300	630	50	30	9W	
PH-300-2500-33	Glass/Glass	300	640	50	30	9W	
PH-300-2500-34	Glass/Glass	300	650	50	30	9W	
PH-300-2500-35	Glass/Glass	300	660	50	30	9W	
PH-300-2500-36	Glass/Glass	300	670	50	30	9W	
PH-300-2500-37	Glass/Glass	300	680	50	30	9W	
PH-300-2500-38	Glass/Glass	300	690	50	30	9W	
PH-300-2500-39	Glass/Glass	300	700	50	30	9W	
PH-300-2500-40	Glass/Glass	300	710	50	30	9W	
PH-300-2500-41	Glass/Glass	300	720	50	30	9W	
PH-300-2500-42	Glass/Glass	300	730	50	30	9W	
PH-300-2500-43	Glass/Glass	300	740	50	30	9W	
PH-300-2500-44	Glass/Glass	300	750	50	30	9W	
PH-300-2500-45	Glass/Glass	300	760	50	30	9W	
PH-300-2500-46	Glass/Glass	300	770	50	30	9W	
PH-300-2500-47	Glass/Glass	300	780	50	30	9W	
PH-300-2500-48	Glass/Glass	300	790	50	30	9W	
PH-300-2500-49	Glass/Glass	300	800	50	30	9W	
PH-300-2500-50	Glass/Glass	300	810	50	30	9W	
PH-300-2500-51	Glass/Glass	300	820	50	30	9W	
PH-300-2500-52	Glass/Glass	300	830	50	30	9W	
PH-300-2500-53	Glass/Glass	300	840	50	30	9W	
PH-300-2500-54	Glass/Glass	300	850	50	30	9W	
PH-300-2500-55	Glass/Glass	300	860	50	30	9W	
PH-300-2500-56	Glass/Glass	300	870	50	30	9W	
PH-300-2500-57	Glass/Glass	300	880	50	30	9W	
PH-300-2500-58	Glass/Glass	300	890	50	30	9W	
PH-300-2500-59	Glass/Glass	300	900	50	30	9W	
PH-300-2500-60	Glass/Glass	300	910	50	30	9W	
PH-300-2500-61	Glass/Glass	300	920	50	30	9W	
PH-300-2500-62	Glass/Glass	300	930	50	30	9W	
PH-300-2500-63	Glass/Glass	300	940	50	30	9W	
PH-300-2500-64	Glass/Glass	300	950	50	30	9W	
PH-300-2500-65	Glass/Glass	300	960	50	30	9W	
PH-300-2500-66	Glass/Glass	300	970	50	30	9W	
PH-300-2500-67	Glass/Glass	300	980	50	30	9W	
PH-300-2500-68	Glass/Glass	300	990	50	30	9W	
PH-300-2500-69	Glass/Glass	300	1000	50	30	9W	
PH-300-2500-70	Glass/Glass	300	1010	50	30	9W	
PH-300-2500-71	Glass/Glass	300	1020	50	30	9W	
PH-300-2500-72	Glass/Glass	300	1030	50	30	9W	
PH-300-2500-73	Glass/Glass	300	1040	50	30	9W	
PH-300-2500-74	Glass/Glass	300	1050	50	30	9W	
PH-300-2500-75	Glass/Glass	300	1060	50	30	9W	
PH-300-2500-76	Glass/Glass	300	1070	50	30	9W	
PH-300-2500-77	Glass/Glass	300	1080	50	30	9W	
PH-300-2500-78	Glass/Glass	300	1090	50	30	9W	
PH-300-2500-79	Glass/Glass	300	1100	50	30	9W	
PH-300-2500-80	Glass/Glass	300	1110	50	30	9W	
PH-300-2500-81	Glass/Glass	300	1120	50	30	9W	
PH-300-2500-82	Glass/Glass	300	1130	50	30	9W	
PH-300-2500-83	Glass/Glass	300	1140	50	30	9W	
PH-300-2500-84	Glass/Glass	300	1150	50	30	9W	
PH-300-2500-85	Glass/Glass	300	1160	50	30	9W	
PH-300-2500-86	Glass/Glass	300	1170	50	30	9W	
PH-300-2500-87	Glass/Glass	300	1180	50	30	9W	
PH-300-2500-88	Glass/Glass	300	1190	50	30	9W	
PH-300-2500-89	Glass/Glass	300	1200	50	30	9W	
PH-300-2500-90	Glass/Glass	300	1210	50	30	9W	
PH-300-2500-91	Glass/Glass	300	1220	50	30	9W	
PH-300-2500-92	Glass/Glass	300	1230	50	30	9W	
PH-300-2500-93	Glass/Glass	300	1240	50	30	9W	
PH-300-2500-94	Glass/Glass	300	1250	50	30	9W	
PH-300-2500-95	Glass/Glass	300	1260	50	30	9W	
PH-300-2500-96	Glass/Glass	300	1270	50	30	9W	
PH-300-2500-97	Glass/Glass	300	1280	50	30	9W	
PH-300-2500-98	Glass/Glass	300	1290	50	30	9W	
PH-300-2500-99	Glass/Glass	300	1300	50	30	9W	
PH-300-2500-100	Glass/Glass	300	1310	50	30	9W	
PH-300-2500-101	Glass/Glass	300	1320	50	30	9W	
PH-300-2500-102	Glass/Glass	300	1330	50	30	9W	
PH-300-2500-103	Glass/Glass	300	1340	50	30	9W	
PH-300-2500-104	Glass/Glass	300	1350	50	30	9W	
PH-300-2500-105	Glass/Glass	300	1360	50	30	9W	
PH-300-2500-106	Glass/Glass	300	1370	50	30	9W	
PH-300-2500-107	Glass/Glass	300	1380	50	30	9W	
PH-300-2500-108	Glass/Glass	300	1390	50	30	9W	
PH-300-2500-109	Glass/Glass	300	1400	50	30	9W	
PH-300-2500-110	Glass/Glass	300	1410	50	30	9W	
PH-300-2500-111	Glass/Glass	300	1420	50	30	9W	
PH-300-2500-112	Glass/Glass	300	1430	50	30	9W	
PH-300-2500-113	Glass/Glass	300	1440	50	30	9W	
PH-300-2500-114	Glass/Glass	300	1450	50	30	9W	
PH-300-2500-115	Glass/Glass	300	1460	50	30	9W	
PH-300-2500-116	Glass/Glass	300	1470	50	30	9W	
PH-300-2500-117	Glass/Glass	300	1480	50	30	9W	
PH-300-2500-118	Glass/Glass	300	1490	50	30	9W	
PH-300-2500-119	Glass/Glass	300	1500	50	30	9W	
PH-300-2500-120	Glass/Glass	300	1510	50	30	9W	
PH-300-2500-121	Glass/Glass	300	1520	50	30	9W	
PH-300-2500-122	Glass/Glass	300	1530	50	30	9W	
PH-300-2500-123	Glass/Glass	300	1540	50	30	9W	
PH-300-2500-124	Glass/Glass	300	1550	50	30	9W	
PH-300-2500-125	Glass/Glass	300	1560	50	30	9W	
PH-300-2500-126	Glass/Glass	300	1570	50	30	9W	
PH-300-2500-127	Glass/Glass	300	1580	50	30	9W	
PH-300-2500-128	Glass/Glass	300	1590	50	30	9W	
PH-300-2500-129	Glass/Glass	300	1600	50	30	9W	
PH-300-2500-130	Glass/Glass	300	1610	50	30	9W	
PH-300-2500-131	Glass/Glass	300	1620	50	30	9W	
PH-300-2500-132	Glass/Glass	300	1630	50	30	9W	
PH-300-2500-133	Glass/Glass	300	1640	50	30	9W	
PH-300-2500-134	Glass/Glass	300	1650	50	30	9W	
PH-300-2500-135	Glass/Glass	300	1660	50	30	9W	
PH-300-2500-136	Glass/Glass	300	1670	50	30	9W	
PH-300-2500-137	Glass/Glass	300	1680	50	30	9W	
PH-300-2500-138	Glass/Glass	300	1690	50	30	9W	
PH-300-2500-139	Glass/Glass	300	1700	50	30	9W	
PH-300-2500-140	Glass/Glass	300	1710	50	30	9W	
PH-300-2500-141	Glass/Glass	300	1720	50	30	9W	
PH-300-2500-142	Glass/Glass	300	1730	50	30	9W	
PH-300-2500-143	Glass/Glass	300	1740	50	30	9W	
PH-300-2500-144	Glass/Glass	300	1750	50	30	9W	
PH-300-2500-145	Glass/Glass	300	1760	50	30	9W	
PH-300-2500-146	Glass/Glass	300	1770	50	30	9W	
PH-300-2500-147	Glass/Glass	300	1780	50	30	9W	
PH-300-2500-148	Glass/Glass	300	1790	50	30	9W	
PH-300-2500-149	Glass/Glass	300	1800	50	30	9W	
PH-300-2500-150	Glass/Glass	300	1810	50	30	9W	
PH-300-2500-151	Glass/Glass	300	1820	50	30	9W	
PH-300-2500-152	Glass/Glass	300	1830	50	30	9W	
PH-300-2500-153	Glass/Glass	300	1840	50	30	9W	
PH-300-2500-154	Glass/Glass	300	1850	50	30	9W	
PH-300-2500-155	Glass/Glass	300	1860	50	30	9W	
PH-300-2500-156	Glass/Glass	300	1870	50	30	9W	
PH-300-2500-157	Glass/Glass	300	1880	50	30	9W	
PH-300-2500-158	Glass/Glass	300	1890	50	30	9W	
PH-300-2500-159	Glass/Glass	300	1900	50	30	9W	
PH-300-2500-160	Glass/Glass	300	1910	50	30	9W	
PH-300-2500-161	Glass/Glass	300	1920	50	30	9W	
PH-300-2500-162	Glass/Glass	300	1930	50	30	9W	
PH-300-2500-163	Glass/Glass	300	1940	50	30	9W	
PH-300-2500-164	Glass/Glass	300	1950	50	30	9W	
PH-300-2500-165	Glass/Glass	300	1960	50	30	9W	
PH-300-2500-166	Glass/Glass	300	1970	50	30	9W	
PH-300-2500-167	Glass/Glass	300	1980	50	30	9W	
PH-300-2500-168	Glass/Glass	300	1990	50	30	9W	
PH-300-2500-169	Glass/Glass	300	2000	50	30	9W	
PH-300-2500-170	Glass/Glass	300	2010	50	30	9W	
PH-300-2500-171	Glass/Glass	300	2020	50			



MODEL:JKD-PB-45

[illegible]



MODEL:JKD-SM-F

EASY TO INSTALL



Product	Model	Size (mm)	Capacity	LED Light	Working Voltage	Size	Material
Water Feature	JKD-SM-F	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel
	JKD-SM-F	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel
	JKD-SM-F	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel
	JKD-SM-F	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel



MODEL:JKD-SM-Y


EASY TO INSTALL



Product	Model	Size (mm)	Capacity	LED Light	Working Voltage	Size	Material
Water Feature	JKD-SM-Y	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel
	JKD-SM-Y	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel
	JKD-SM-Y	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel
	JKD-SM-Y	1000*1000	200L	Blue	12V	1000*1000	Stainless Steel



MODEL:JKD-HG03



Product	Model	Dimensions	Light Source	Water Flowage	Water Material
Jet Rock Waterfall / Water Feature	JKD-HG03	400x200x100mm / 15.7x7.9x3.9in	LED 12V 24W 12V 24W	90 L/min	Stainless Steel / Brass / Copper



MODEL:JKD-HG05



Product	Model	Dimensions	Light Source	Water Flowage	Water Material
Jet Rock Waterfall / Water Feature	JKD-HG05	400x200x100mm / 15.7x7.9x3.9in	LED 12V 24W 12V 24W	90 L/min	Stainless Steel / Brass / Copper




Product	Model	Size(mm)	Light Source	Take water way	Water Material
Modern Waterfall Water System	MS-001	1100*200*110 1100*200*110 1100*200*110	Water LED light Water LED light	Upward	Stainless Steel or ABS



Product	Model	Size(mm)	Light Source	Take water way	Water Material
Modern Waterfall Water System	MS-002	1100*200*110 1100*200*110 1100*200*110	Water LED light Water LED light	Upward	Stainless Steel or ABS



Product	Model	Size(mm)	Light Source	Take water way	Water Material
Modern Waterfall Water System	MS-003	1100*200*110 1100*200*110 1100*200*110	Water LED light Water LED light	Upward	Stainless Steel or ABS

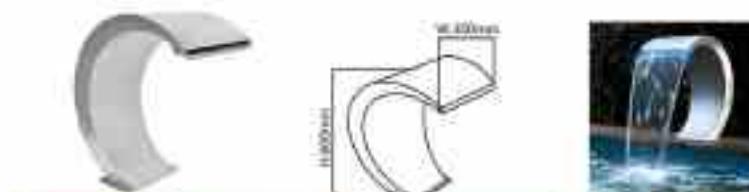

Product	Model	Size(mm)	Light Source	Take water way	Water Material
Modern Waterfall Water System	MS-004	1100*200*110 1100*200*110 1100*200*110	Water LED light Water LED light	Upward	Stainless Steel or ABS



Product	Model	Size(mm)	Light Source	Take water way	Water Material
Modern Waterfall Water System	MS-005	1100*200*110 1100*200*110 1100*200*110	Water LED light Water LED light	Upward	Stainless Steel or ABS




Product	Model	Size(mm)	Light Source	Take water way	Water Material
Modern Waterfall Water System	MS-006	1100*200*110 1100*200*110 1100*200*110	Water LED light Water LED light	Upward	Stainless Steel or ABS



Product	Model	Dimensions	Light Source	Light Installation	Body Material
40° Hook Waterfall Water Fountain	40°-4022	1500*1500 / 1500*1500 (1500*1500 / 1500*1500)	Internal LED light 10W LED light	None	Stainless Steel and Steel




Product	Model	Dimensions	Light Source	Light Installation	Body Material
100° Hook Waterfall Water Fountain	100°-4022	1500*1500	Internal LED light 10W LED light	None	Stainless Steel and Steel





Product	Model	Dimensions	Light Source	Light Installation	Body Material
1° Sloped Waterfall Water Fountain	1°-4022	1500*1500	Internal LED light 10W LED light	None	Stainless Steel and Steel



Product	Model	Dimensions	Light Source	Light Installation	Body Material
30° Sloped Waterfall Water Fountain	30°-4022	1500*1500	Internal LED light 10W LED light	None	Stainless Steel and Steel



Product	Model	Dimensions	Light Source	Light Installation	Body Material
90° Sloped Waterfall Water Fountain	90°-4022	1500*1500	Internal LED light 10W LED light	None	Stainless Steel and Steel





Product	Model	1000mm High	Flow (l/min)	Power (W)	Height (m)	Flow (l/min)	Power (W)	Height (m)	Flow (l/min)	Power (W)	Height (m)
1000W 1000mm High Fountain Pump Unit	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0



Product	Model	1000mm High	Flow (l/min)	Power (W)	Height (m)	Flow (l/min)	Power (W)	Height (m)	Flow (l/min)	Power (W)	Height (m)
1000W 1000mm High Fountain Pump Unit	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0




Features

Water is pumped upwards by the force of the water pump unit to create various water features. The pump unit is designed to be used in a variety of applications, including fountains, waterfalls, and other water features. The pump unit is made of high-quality materials and is designed to be durable and long-lasting. The pump unit is also easy to install and maintain.



Performance chart

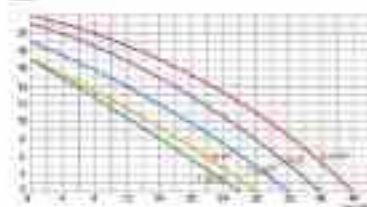

- 1. 1000W 1000mm High Fountain Pump Unit
- 2. 1000W 1000mm High Fountain Pump Unit
- 3. 1000W 1000mm High Fountain Pump Unit
- 4. 1000W 1000mm High Fountain Pump Unit
- 5. 1000W 1000mm High Fountain Pump Unit
- 6. 1000W 1000mm High Fountain Pump Unit
- 7. 1000W 1000mm High Fountain Pump Unit
- 8. 1000W 1000mm High Fountain Pump Unit
- 9. 1000W 1000mm High Fountain Pump Unit
- 10. 1000W 1000mm High Fountain Pump Unit

- 11. 1000W 1000mm High Fountain Pump Unit
- 12. 1000W 1000mm High Fountain Pump Unit
- 13. 1000W 1000mm High Fountain Pump Unit
- 14. 1000W 1000mm High Fountain Pump Unit
- 15. 1000W 1000mm High Fountain Pump Unit
- 16. 1000W 1000mm High Fountain Pump Unit
- 17. 1000W 1000mm High Fountain Pump Unit
- 18. 1000W 1000mm High Fountain Pump Unit
- 19. 1000W 1000mm High Fountain Pump Unit
- 20. 1000W 1000mm High Fountain Pump Unit



Product	Model	1000mm High	Flow (l/min)	Power (W)	Height (m)	Flow (l/min)	Power (W)	Height (m)	Flow (l/min)	Power (W)	Height (m)
1000W 1000mm High Fountain Pump Unit	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0
	1000-100	1000mm High	100	1000	1.0	100	1000	1.0	100	1000	1.0



MODEL JKD-RY



Model	Model	Power	Dimensions	Working Voltage	Body Material	Insulation grade
Transformer	JKB-8	10W	30*17*15	AC220V	Polyester Epoxy resin	Fuk
		20W	30*17*15			
		30W	30*17*15			
		40W	40*20*16			
		50W	50*20*16			
		60W	60*20*16			
		80W	80*20*16			
		100W	100*20*16			
		150W	150*20*16			
		200W	200*20*16			
		300W	300*20*16			
		500W	500*20*16			



MODEL JKD-KG



Model	Model	Power	Dimensions	Working Voltage	Body Material	Insulation grade
Transformer	JKD-KG	10W	30*17*15	AC220V	Polyester Epoxy resin	Fuk
		20W	30*17*15			
		30W	30*17*15			
		40W	40*20*16			
		50W	50*20*16			
		60W	60*20*16			
		80W	80*20*16			
		100W	100*20*16			
		150W	150*20*16			
		200W	200*20*16			
		300W	300*20*16			
		500W	500*20*16			


Fountain Nozzle



Fountain Nozzle



■ SPA series



■ Customisable waterfall water curtain

